
WRF-Hydro GIS Pre-processing Tool Overview

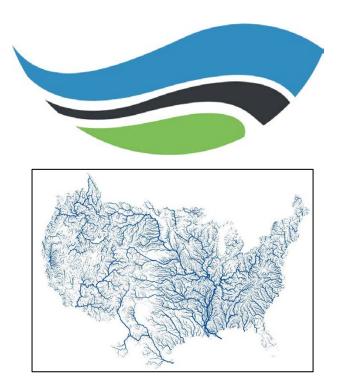


K. Sampson and M. Casali National Center for Atmospheric Research

Outline

- WRF-Hydro ArcGIS Pre-processing tools
- Basic GIS terrain pre-processing for WRF-Hydro
- Demonstration: Generating WRF-Hydro Routing Grids

WRF-Hydro ArcGIS Pre-Processing Toolkit

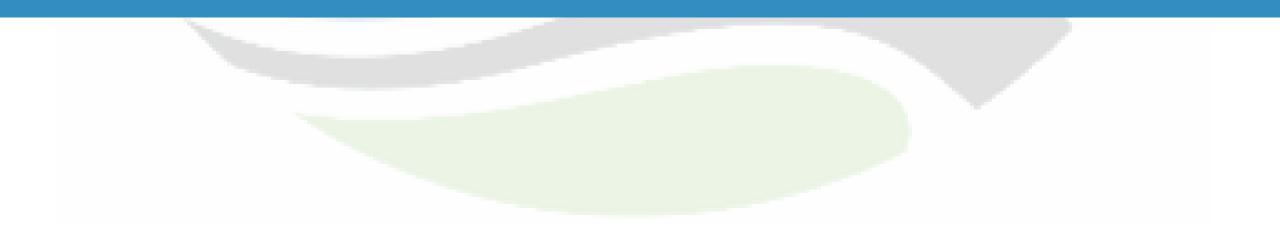

WRF-Hydro GIS Tools

- Pre-processing tools, written in Python, using ArcGIS python API (arcpy)
- Variety of WRF-Hydro configuration options supported
- Fast, efficient method for producing the 'routing stack' necessary to run WRF-Hydro
- Consistent processing methodology between domains, regions, datasets
- Provides WRF-Hydro with a complete set of hydrologically processed routing grids and spatial metadata
- Removes the heavy GIS burden from modelers
 - https://ral.ucar.edu/projects/wrf_hydro/pre-processing-tools

GitHub https://github.com/NCAR/wrf_hydro_arcgis_preprocessor

```
    GEOGRID_STANDALONE.pyt
    Processing
    Process GEOGRID File
    Utilities
    Add Lake Parameters
    Add reach-based routing
    Build GWBUCKPARM Table
    Build Spatial Metadata File
    Create Domain Boundary Shapefile
    Examine Outputs of GIS Preprocessor
    Export ESRI projection file (PRJ) from GEOGRID file
    Export grid from GEOGRID file
    Generate Latitude and Longitude Rasters
```

WRF-Hydro & ArcGIS

- Desktop GIS Application Suite
- Site-licenses available at most US academic institutions
- Ecosystem of compatible hydrology tools
 - Spatial Analyst
 - ArcHydro
 - TauDEM
 - Whitebox Tools
- Extensible using Python API (arcpy)
- Handles everything from projections, to analysis, to mapmaking in one library
- netCDF4-Python included as of 10.3




Requirements

- ArcGIS for Desktop
 - Version 10.3.1 or higher, or ArcGIS Pro
 - has been minimally tested with versions 10.4, 10.7.1
 - Any license level (Basic, Standard, or Advanced)
 - Spatial Analyst extension required
 - Any Python version installed with ArcGIS Desktop / Pro
 - ArcGIS Desktop 10.3: Python 2.7.8, NumPy 1.7.1
 - ArcGIS Pro 2.4.1: Python 3.6.8, NumPy 1.16.2

Python Toolboxes

• Python script wrapped to act as an ArcGIS Toolbox



- PYT file is the toolbox script containing multiple toolsets
 - Functions called from separate script (wrf_hydro_functions.py)
- Parameter handling and validation


<u>Advantages</u> Easy to modify Portable Many tools organized

Python Toolboxes (.pyt)

• Toolboxes wrapped in Python script...


```
# --- Toolbox Classes --- #
class Toolbox(object):
    def init (self):
        """Define the toolbox (the name of the toolbox is the name of the
        .pyt file)."""
        self.label = "WRFHydro GIS Pre-Processor"
        self.alias = ""
        self.description = "This is a standalone ArcGIS geoprocessing toolbox for WRF-Hydro."
        # List of tool classes associated with this toolbox
        self.tools = [ProcessGeogridFile,
                        ExportGrid,
                        ExamineOutputs,
                        ExportPRJ,
                        GenerateLatLon,
                        SpatialMetadataFile,
                        DomainShapefile,
                        Reach Based Routing Addition,
                        Lake Parameter Addition]
class ProcessGeogridFile(object):
    def init (self):
        """Define the tool (tool name is the name of the class)."""
        self.label = "Process GEOGRID File"
        self.description = "This tool takes an input WRF GEOGRID file in NetCDF format" + \
                           " and uses the HGT_M grid and an input high-resolution elevation grid" + \setminus
                           "to produce a high-resolution hydrologically processed output."
        self.canRunInBackground = True
                                                                                 #self.canRunInBackground = False
        self.category = "Processing"
    def getParameterInfo(self):
         """Define parameter definitions"""
        in_nc = arcpy.Parameter(
            displayName="Input GEOGRID File",
            name="in nc",
            datatype="File",
            parameterType="Required",
            direction="Input")
        in_csv = arcpy.Parameter(
            displayName="Forecast Points (CSV)",
            name="in csv",
            datatype="File",
```

Preprocessor

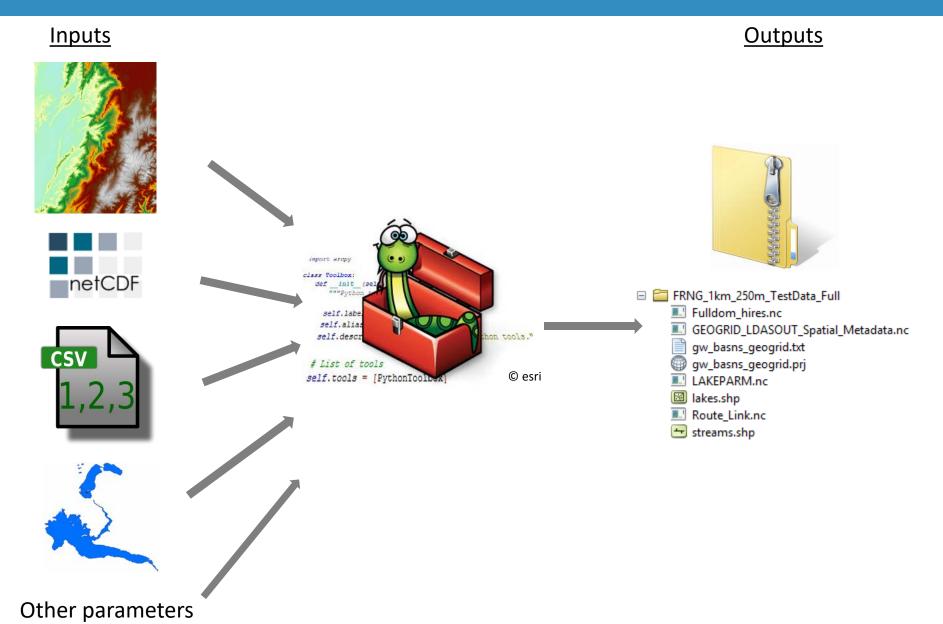

NetCDF File Format

- <u>network Common Data Form</u>
 - ".nc" extension
- Self describing
 - Includes information about the data coordinate system
- Machine independent
 - Usable in many operating systems
- Used extensively in Atmospheric Science
- Binary
- Multidimensional
 - x,y,z,t



Fulldom File (Routing Grids)

- netCDF WRF-Hydro input file
- Full high-resolution domain file (Fulldom_hires.nc)
- Stores all routing grids as 2-dimensional variables
- Stores CF-compliant spatial metadata
 - grid_mapping
 - Projection information
 - Coordinate System variable
 - ArcGIS-compliant projection information
- Easy to import into GIS Applications (ArcGIS, QGIS)
- Ingested directly by WRF-Hydro

A Note on CF Metadata

- Climate and Forecast Conventions for netCDF data
 - Like a standard
 - Current version 1.7
 - http://cfconventions.org/latest.html
- CF conventions for just about any type of data
 - Gridded
 - Point
 - Profile
 - timeSeries
- CF-compliant netCDF files make them much easier to use in client applications
 - Panoply, ArcGIS, QGIS

Process Geogrid File

💱 Process GEOGRID File			- 🗆 ×
Input GEOGRID File	2	^	Process GEOGRID File
Forecast Points (CSV) (optional)	<u> </u>		This tool takes an input WRF GEOGRID file in NetCDF format and uses the HGT M grid and an input
Mask CHANNELGRID variable to forecast basins? (optional)			high-resolution elevation gridto produce a high-resolution hydrologically processed output.
Create reach-based routing (RouteLink) files? (optional)			
Create lake parameter (LAKEPARM) file? (optional) Reservoirs Shapefile or Feature Class (optional)			
Input Elevation Raster	6		
Regridding (nest) Factor	e		
Number of routing grid cells to define stream	10		
Output ZIP File	200		
WRF_Hydro_routing_grids.zip	6		
OVROUGHRTFAC Value			
1 RETDEPRTFAC Value			
1	Ċ	\sim	
<	>		*
OK Cancel Environments << Hi	ide Help	1	Tool Help

Inputs

- Required:
 - WRF GEOGRID file (.nc)
 - High-resolution Elevation
 - Elevation file (Esri GRID, GeoTIFF, etc.)
 - Mosaic Dataset
- Parameters
 - Regridding Factor nesting relationship of routing:land grids
 - Minimum basin size (in routing grid cells)
 - OVROUGHRTFAC constant
 - RETDEPRTFAC constant
 - LKSATFAC constant
- Optional:
 - Station Locations (.csv)
 - Lake Polygons (polygon feature class or .shp)

Model Domain

- Area of interest
- Defines model domain
 - Size
 - Location
 - Horizontal resolution
- Defined by GEOGRID file

 geo_em.d03.nc

• Example:

to . Lake Ontar uffalo. • Rocheste NNSVI2 01374559 01374581 Lake, NHD ID: 622811 Flow network 0137462010 USGS Gages Watershed Mahon

Input: WRF Geogrid File

The purpose of the Geogrid file is to define the simulation domain and interpolate various static geographical datasets to the model grid.

- GEOGRID is used in the WRF-Hydro GIS Pre-processor to define the domain's coordinate reference system, extent, resolution, and certain 2D variables:
 - HGT_M (elevation)
 - LU_INDEX (landuse)
- Currently supported GEOGRID coordinate systems
 - MAP_PROJ = 1 (Lambert Conformal Conic)
 - MAP_PROJ = 3 (Mercator)
 - MAP_PROJ = 6 (Cylindrical Equidistant but NOT w/ rotated pole)
 - MAP_PROJ = 2 (Polar Stereographic)


GEOGRID: Projected Coordinate System

Front_Range_geo_em.d02.nc WKT "PROJCS['Lambert Conformal Conic', GEOGCS['GCS Sphere', DATUM['D Sph :TITLE = "OUTPUT FROM GEOGRID V3.5.1"; ere',SPHEROID['Sphere',6370000.0,0.0]],PRIMEM['Greenwich',0.0],UNI :SIMULATION START DATE = "0000-00-00 00:00:00"; T['Degree',0.0174532925199433]],PROJECTION['Lambert Conformal Coni :WEST-EAST GRID DIMENSION = 50; // int c'],PARAMETER['false_easting',0.0],PARAMETER['false_northing',0.0] :SOUTH-NORTH GRID DIMENSION = 36; // int :BOTTOM-TOP GRID DIMENSION = 0; // int ,PARAMETER['central meridian',-**105.0**], PARAMETER['standard parallel 1', **30.0**], PARAMETER['standard p :WEST-EAST PATCH START UNSTAG = 1; // int :WEST-EAST PATCH END UNSTAG = 49; // int arallel 2', 50.0], PARAMETER['latitude of origin', 39.9400138855], UNI :WEST-EAST PATCH START STAG = 1; // int T['Meter',1.0]];-36695400 -29251300 10000;-100000 10000;-100000 :WEST-EAST PATCH END STAG = 50; // int 10000;0.001;0.001;0.001;IsHighPrecision" :SOUTH-NORTH PATCH START UNSTAG = 1; // int :SOUTH-NORTH PATCH END UNSTAG = 35; // int :SOUTH-NORTH PATCH START STAG = 1; // int :SOUTH-NORTH PATCH END STAG = 36; // int :GRIDTYPE = "C"; geo_em.d01.boulder_creek_1km.prj :DX = 1000.0f; // float :DY = 1000.0f; // float :DYN OPT = 2; // int :CEN LAT = 39.940014f; // float :CEN LON = -105.42999f; // float :TRUELAT1 = 30.0f; // float :TRUELAT2 = 50.0f; // float :MOAD CEN LAT = 39.940014f; // float :STAND LON = -105.0f; // float :POLE LAT = 90.0f; // float :POLE LON = 0.0f; // float :corner lats = 39.783337f, 40.093864f, 40.095993f, 3 :corner lons = -105.714264f, -105.71753f, -105.14442 :MAP PROJ = 1; // int :MMINLU = "USGS"; :NUM LAND CAT = 24; // int :ISWATER = 16; // int :ISLAKE = -1; // int :ISICE = 24; // int :ISURBAN = 1; // int :ISOILWATER = 14; // int :grid id = 1; // int :parent id = 1; // int :i parent_start = 1; // int :j parent start = 1; // int :i parent end = 50; // int :j parent end = 36; // int :parent grid ratio = 1; // int :sr x = 1; // int :sr y = 1; // int :FLAG MF XY = 1; // int


Input Elevation Raster


- Must be an ArcGIS-readable raster format
- Must contain valid coordinate reference system
- Must cover entire extent (and more) of your GEOGRID domain
- Elevation units must be converted to meters (m)
- Should by hydrologically corrected
 - Not necessary but helps with channel placement, hydro enforcement, etc.

Input Elevation Mosaics

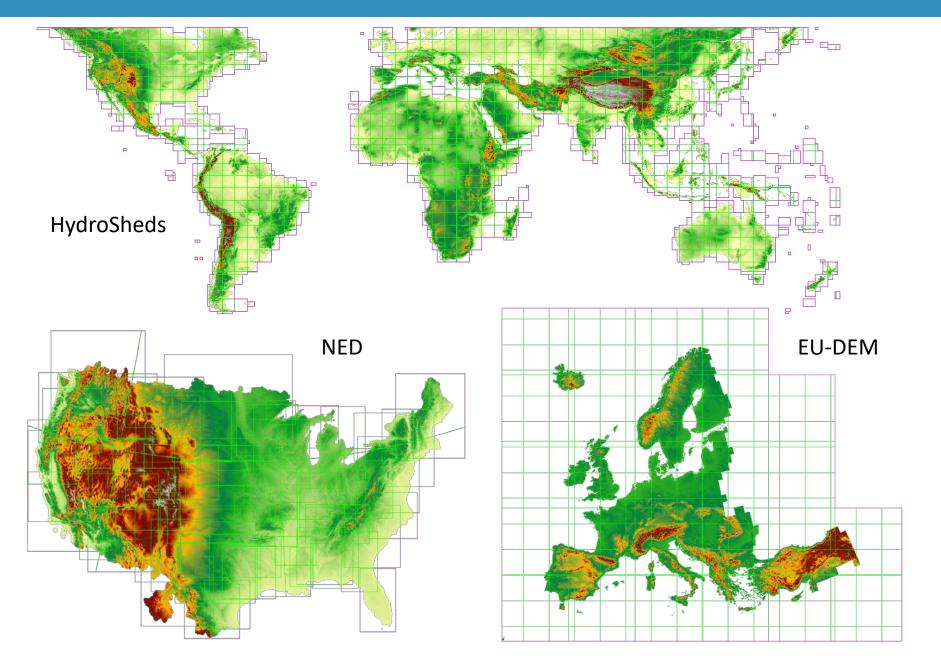


Input Regriddng Factor

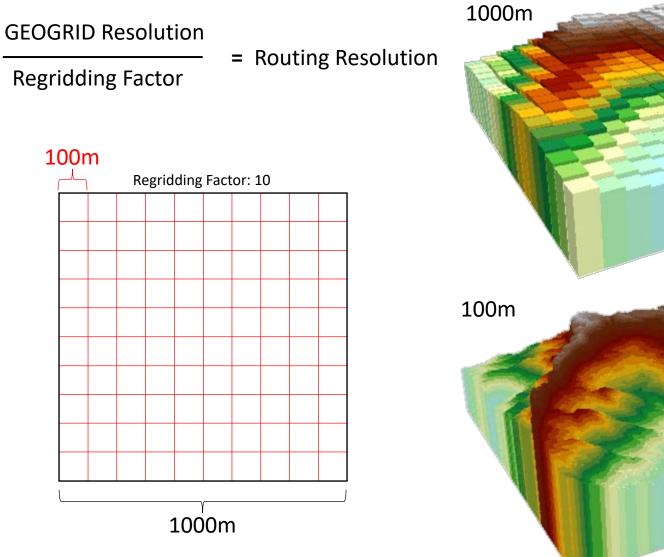

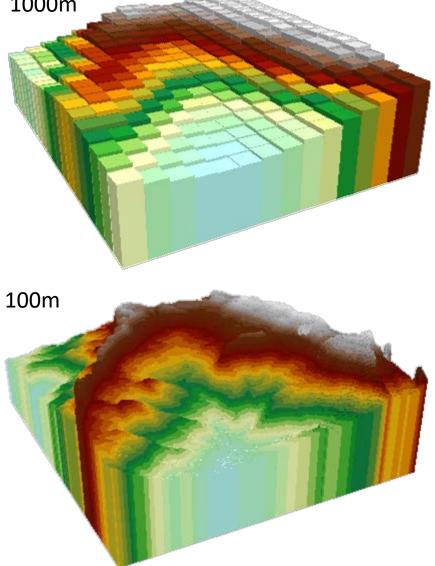

Raster Resolution for Terrain Processing

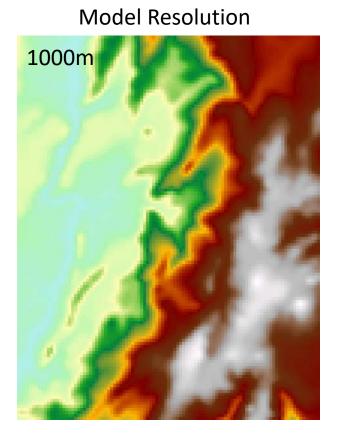


30m

High Resolution

Terrain Pre-processing Workflow

- Resample high-resolution DEM and land use
- Void-fill the resampled DEM
- D8 Flow Direction
- Flow Accumulation
- Derive CHANNELGRID from flow accumulation raster using threshold of minimum basin size
- Derive Strahler stream order from CHANNELGRID

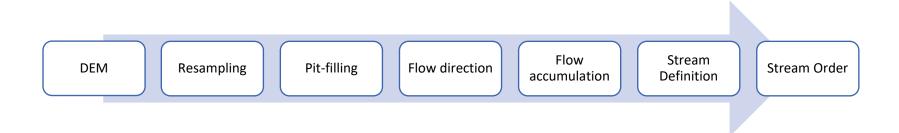


Basic workflow for terrain pre-processing of WRF-Hydro routing grids.

Reproject & Resample Hydro DEM

- Project input DEM to model projection and domain
- Resample to routing grid resolution
 - BILINEAR resampling uses a distance-weighted average of the 4 nearest cell centers.
- Re-projection and resampling can 'break' the input HydroDEM.
 - Causing artificial 'pits'.
 - Filling in 'burned in' areas.
- Even though we start with a HydroDEM, we 'break' it, then recondition it.

Process: Pit Filling

Spatial Analyst "Fill" Tool




 $\hfill \mbox{\composition} \end{composition} \$

- Fill depressions so that water can roll downhill only. This also creates a smoother Dem than you might find in nature.
- This simple hydro-enforcement method can resolve most flow issues in a DEM.
- Optional z-limit (global variable) to limit fill depth.


Pit Filling Issues

• ...some pits are natural, some are not.

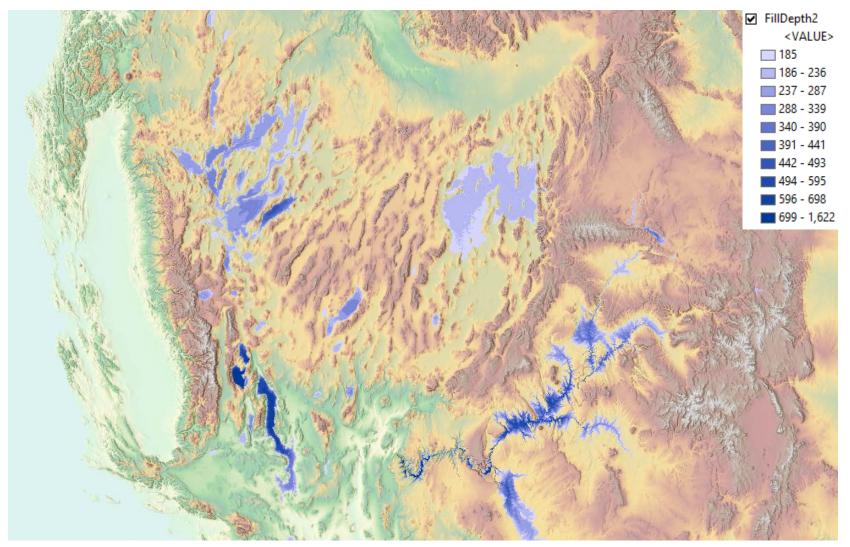


Resampling can break hydrologic connectivity

- Coarsening a HydroDEM can break hydrologic connectivity.
- Try not to get too much coarser than input HydroDEM, or perform extensive hydro-enforcement on you input DEM first.
- Here, a canyon outlet is filled, causing entire valley to fill during pit-filling process.

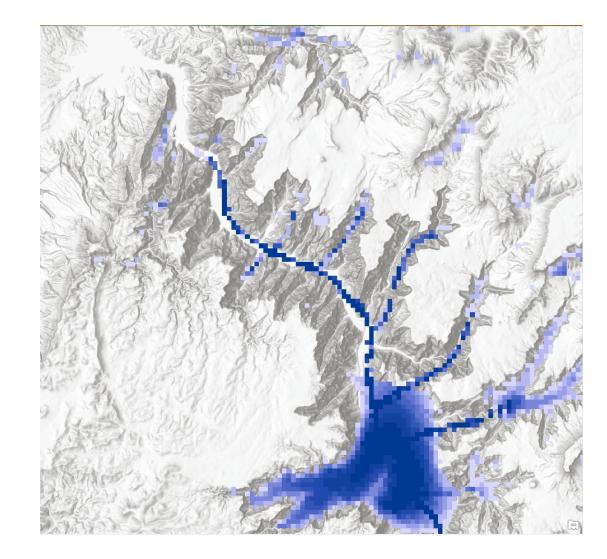


Flow Direction & Flow Accumulation

• D8 Flow Direction




• Flow Accumulation



0	0	0	0	0	0
0	1	1	2	2	0
0	3	7	5	4	0
0	0	0	20	0	1
0	0	0	1	24	0
0	2	4	7	35	1
Flow accumulation					


 $\ensuremath{\mathbb{C}}$ Esri: http://desktop.arcgis.com/en/arcmap/latest/tools/spatial-analyst-toolbox/how-flow-accumulation-works.htm

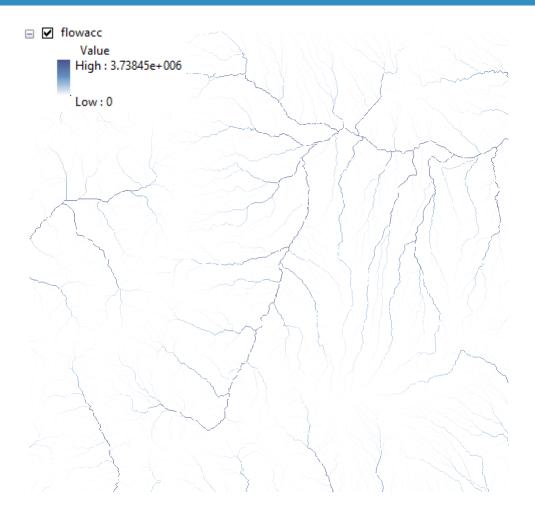

Methods: Jenson and Domingue (1988)


Stream Definition

- Input Parameter: Number of pixels to define stream
 - Yields a minimum 'basin' size
 - Given in pixels (unitless), on the routing grid
 - Affects density of generated channel network

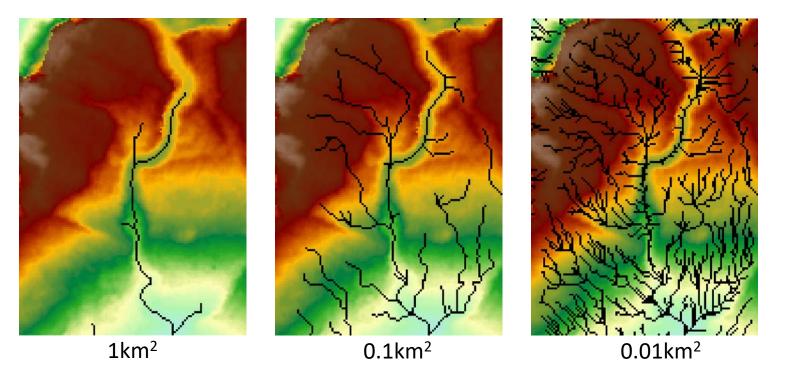

An analytic method for determining an appropriate threshold value for stream network delineation is presented in Tarboton et al. (1991)

Stream Definition

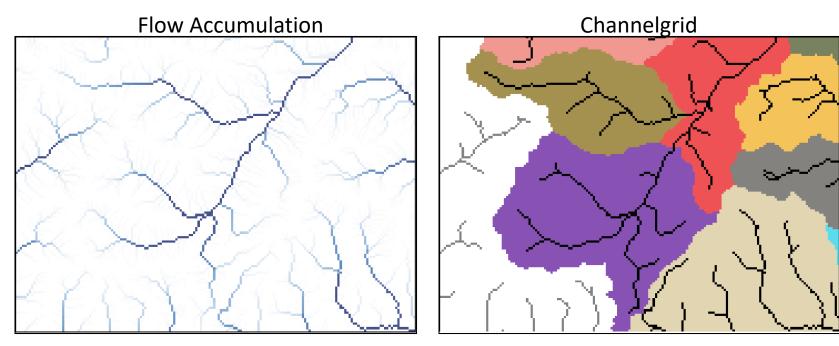

- Use flow accumulation threshold to define channels
- Option: use gaged basins as mask to assign CHANNELGRID values
- If reach-based routing is selected, **Stream to Feature** used to create vector geometry of streams
 - streams.shp shapefile written to output directory

Forecast Points

FID_	LON	LAT	STATION	Name	HOST	ELEV	DRAIN_AREA_SQMI	DRAIN_AREA_SQKM
1	-103.79889	40.26861	S_PLATTE_at_FT_MORGAN	6759500	USGS	4260	14627	37883.93
2	-108.26556	39.23917	COLO_at_CAMEO	9095500	USGS	4813	8050	20849.5
3	-104.39861	38.24806	ARKANSAS_nr_AVONDALE	7109500	USGS	4509	6327	16386.93
4	-105.88002	37.481392	RIO_GRANDE_nr_ALAMOSA	8223000	USGS	-9999	0	0

FID,LON,LAT,STATION,Name 15,-105.92833,40.08139,Fraser_at_Granby,9033300 18,-105.9,40.12083,COLO_nr_GRANBY,9019500 20,-106.3333,39.8803,Blue_R_blw_Grn_Mtn,9057500


- Create in Excel, Notepad, GIS, etc.
- Direct output of attribute table from shapefile or feature class
- "LON", "LAT", "FID" required
- If present, basins will be delineated using the points provided
 - frxst_basns output variable will be populated
 - frxst_pts & basin_msk variables will be populated
- If masked to basins, CHANNELGRID will have values -1, 0, -9999

Process: Basin Delineation

- Snap points to streams
- 'Walk' down channel network a specified distance
 - Default = 3 pixel widths (global variable)
- Delineate basin using Watershed Spatial Analyst tool
 - Writes output file to: frxst_pts
 - basn_msk


Basin Masking

- Option to 'turn off' channel networks outside gaged basins.
- If gages are provided and the option to mask CHANNELGRID to basins is selected.
 - Channel pixels inside gaged basins = 0
 - Channels outside = -1

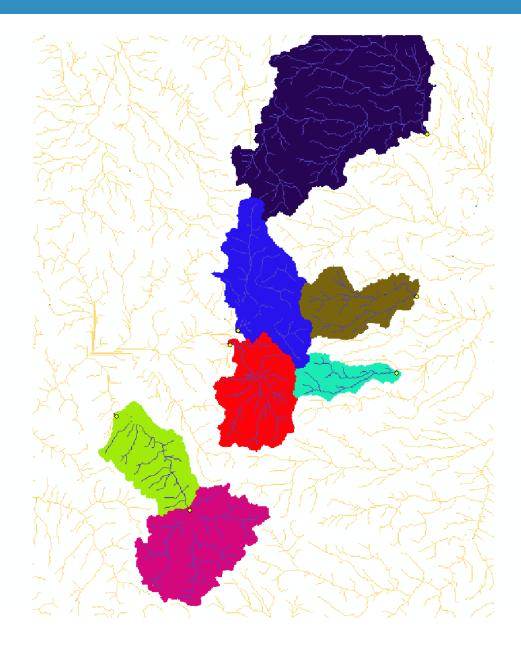


Reach-Based Routing Background

- A vector-based approach to routing flow
- Channel network is comprised of 'links' instead of pixels
- Derive the channel network automatically from the
- Muskingum-Cunge parameters applied to reaches
- With network topology defined, flow can be routed down reaches
- Computational efficiency vs. gridded methods

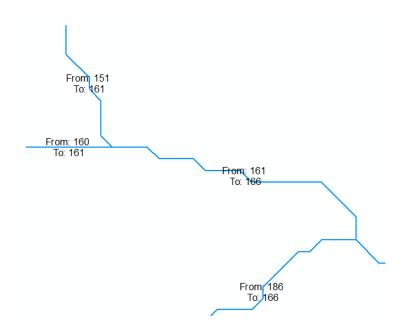

Process: Reach-Based Routing

- CHANNELGRID raster is converted to a line vector (streams.shp)
- Decomposes line geometry to nodes, and gathers elevation, Latitude, and Longitude at each node
- LINKID grid in Fulldom file is created and populated with link ID values
- Constructs a .nc file with necessary parameters for reach-based routing:
 - Length, Slope, Order, Drop, X/Y, etc.
 - Writes output file to Route_Link.nc

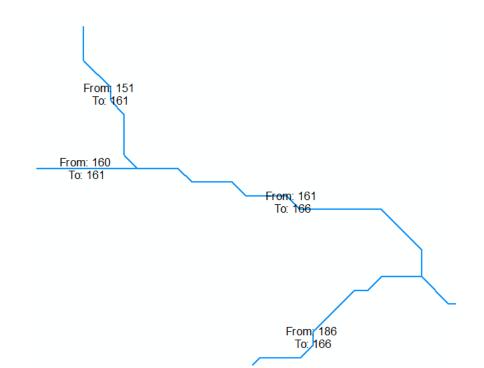

Reach-Routing Table

- CF-netCDF file containing reach-routing parameters
- Mix of derived attributes and default values

Parameter	Description
link	Link ID
from	From Link ID
to	To Link ID
lon	longitude of the start node
lat	latitude of the start node
alt	Elevation in meters from DEM at start node
order	Stream order (Strahler)
Qi	Initial flow in link (CMS)
MusK	Muskingum routing time (s)
MusX	Muskingum weighting coefficient
Length	Stream length (m)
n	Manning's roughness
So	Slope (meters/meter)
ChSlp	Channel side slope
BtmWdth	Bottom width of channel
Kchan	Channel conductivity (mm/hr)
х	X-coordinate in projected coordinate system
У	Y-coordinate in projected coordinate system

Route_Link.nc

- netCDF file to store link information
 - 1-Dimension (linkDim)
- CF-netCDF 'timeSeries' convention


<u>Defaults</u>	
Qi:	0 cms
MusK:	3600 s
MusX:	0.2
n:	0.035
ChSlp:	0.05
BtmWdth:	5 m
Kc:	0 mm/hr

netcdf Route_Link { dimensions: linkDim = 5726 ; variables: int link(linkDim) ; link:long_name = "Link ID"; link:cf_role = "timeseries_id"; int from(linkDim); from:long_name = "From Link ID" ; from:coordinates = "lat lon" ; int to(linkDim) ; to:long_name = "To Link ID"; to:coordinates = "lat lon"; float lon(linkDim); lat:long_name = "latitude of the start node"; lat:units = "degrees_north"; lat:standard_name = "latitude"; float alt(linkDim); alt:long_name = "Elevation in meters at start node"; alt:standard_name = "height"; alt:units = "m"; alt:positive = "up"; alt:axis = "Z"; int order(linkDim); owder:long = "Commence of the line"; output:long = "Commence of the line"; output:long = "Commence of the line"; owder:long = "Commence of the line"; owder:long = "Commence of the line"; owder:long = "Commence of the line"; output:long = "Commence of the line"; owder:long = "Co order:long_name = "Stream order (Strahler)"; order:coordinates = "lat lon"; float Qi(linkDim); MusK:long_name = "Muskingum routing time (s)"; MusK:coordinates = "lat lon"; float MusX(linkDim); MusX:long_name = "Muskingum weighting coefficient"; MusX:coordinates = "lat lon"; float Length(linkDim); Length:long_name = "Stream length (m)"; Length:coordinates = "lat lon"; float n(linkDim); n:long_name = "Manning\'s roughness" ; n:coordinates = "lat lon" ; float So(linkDim) ; So:long_name = "Slope (%; drop/length)"; So:coordinates = "lat lon"; float ChSlp(linkDim); ChSlp:long_name = "Channel side slope (%; drop/length)"; ChSlp:coordinates = "lat lon"; float BtmWdth(linkDim); BtmWdth:long_name = "Bottom width of channel" ; BtmWdth:coordinates = "lat lon" ; float time ; time:standard_name = "time" ; time:long_name = "time of measurement" ; time:units = "days since 2000-01-01 00:00:00" ; // global attributes: :featureType = "timeSeries" ; :history = "Created Mon May 02 14:43:17 2016" ;

Process: Stream Order

• Stream Order Spatial Analyst tool

- Strahler stream order
- Writes output file to STREAMORDER variable

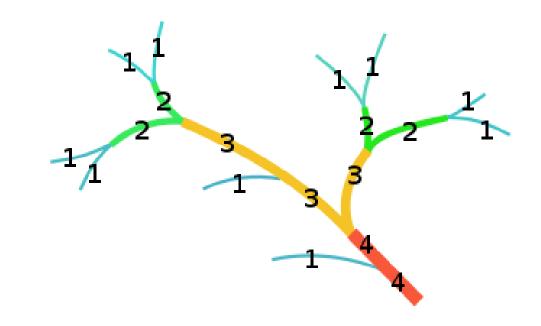


Process: Reservoir Routing

- If the option is selected, a polygon shapefile or feature class is required as input.
- Populates LAKEGRID variable
- Assigns lake ID values to pixels where lakes drain into channel
- Constructs a LAKEPARM.nc file with necessary variables for reservoir routing:
 - Lake area, max elevation, min elevation, base elevation, orifice elevation


```
netcdf LAKEPARM
dimensions:
         nlakes = 82;
variables:
         int lake_id(nlakes);
                   lake_id:long_name = "Lake ID" ;
                   lake_id:cf_role = "timeseries_id" ;
         double LkArea(nlakes);
                   LkArea:long_name = "Gridded lake area (sq. km)";
LkArea:coordinates = "lat lon";
         double LkMxH(nlakes);
                  LkMxH:long_name = "Maximum lake elevation (m ASL)";
                  LkMxH:coordinates = "lat lon";
         double WeirC(nlakes);
                  WeirC:long_name = "Weir coefficient";
                  WeirC:coordinates = "lat lon";
        double WeirL(nlakes);
    WeirL:long_name = "Weir length (m>";
    WeirL:coordinates = "lat lon";
    double OrificeC(nlakes);
                  OrificeC:long_name = "Orifice coefficient" ;
                  OrificeC:coordinates = "lat lon";
         double OrificeA(nlakes);
        OrificeA:long_name = "Orifice cross-sectional area (sq. m)";
OrificeA:coordinates = "lat lon";
double OrificeE(nlakes);
                  OrificeE:long_name = "Orifice elevation (m ASL)";
                  OrificeE:coordinates = "lat lon";
         float lat(nlakes) ;
                   lat:long_name = "latitude of the lake centroid";
                   lat:units = "degrees_north" ;
                   lat:standard_name = "latitude" ;
         float lon(nlakes) ;
                  lon:long_name = "longitude of the lake centroid" ;
lon:units = "degrees_east" ;
lon:standard_name = "longitude" ;
         float alt(nlakes);
                   alt:long_name = "vertical distance above mean sea level in (m ASL)"
                   alt:standard_name = "height";
                  alt:units = "m";
alt:positive = "up";
                   alt:axis = "Z" ;
```

LAKEGRID/LAKEPARM.nc

- Input: Reservoirs shapefile or feature class (polygon)
- Polygons are resolved on the model grid if they are large enough
- Lake ID is renumbered to 1-n

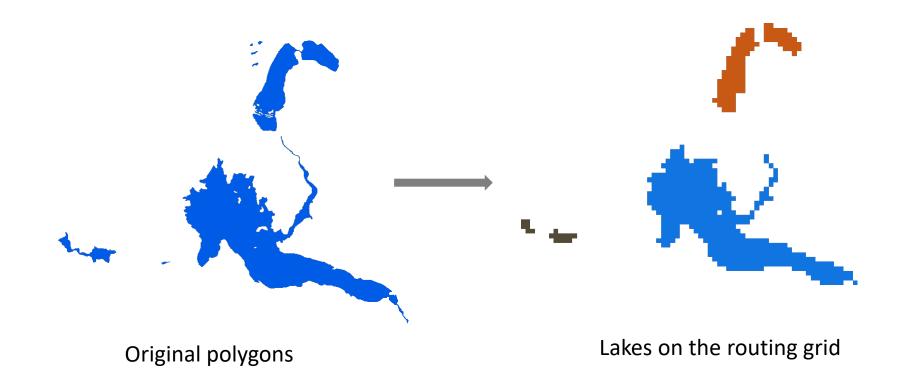

Reservoirs & Channels

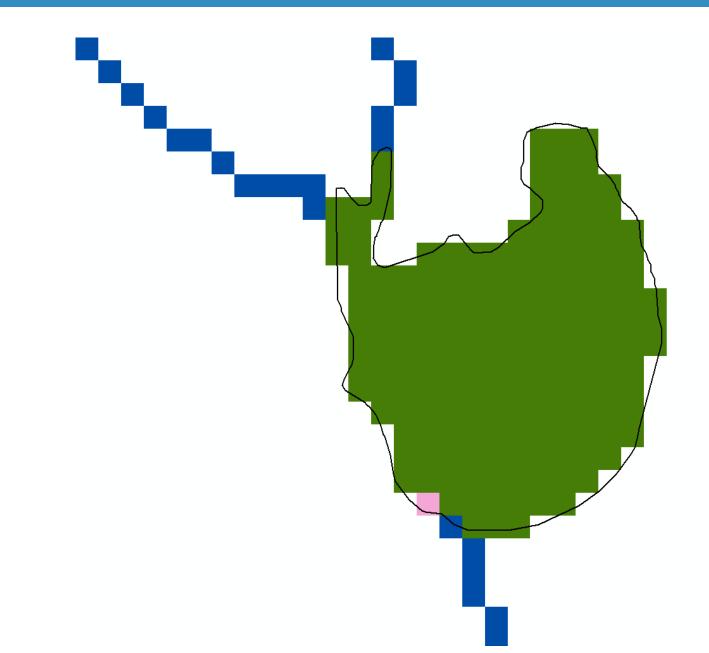

Lakes/Reservoir Routing in the NWM


- Lake parameters are stored in the LAKEPARM.nc lake routing table
- Lakes are defined on the routing grid, parameters in the table

Lake Routing Table

Parameter	Description
LkArea	Gridded lake area (sq. km)
LkMxH	Maximum lake elevation (m ASL)
OrificeA	Orifice cross-sectional area (sq. m)
OrificeC	Orifice coefficient
OrificeE	Orifice elevation (m ASL)
WeirC	Weir coefficient
WeirH	Weir Height (m ASL)
WeirL	Weir length (m)
Ifd	Initial fractional water depth (% full)
lake_id	Lake ID
lat	latitude of the lake centroid
lon	longitude of the lake centroid


Other Grids

- Landuse
 - GEOGRID LU_INDEX resampled (nearest neighbor) to routing grid
- OVROUGHRTFAC
 - Constant 1.0 (float32)
- RETDEPRTFAC
 - Constant 1.0 (float32)
- LKSATFAC
 - Constant 1000.0 (float32)

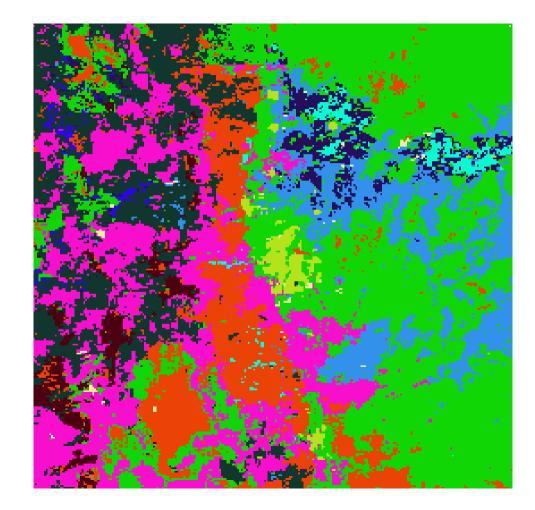

Groundwater Buckets

- Conceptualized baseflow
- Spatially aggregated drainage from soil profile stored in 'buckets' representative of an aquifer
- GWBUCKPARM.nc bucket parameter file
- Buckets resolved on the coarse grid, written to a 2D netCDF file GWBASINS.nc

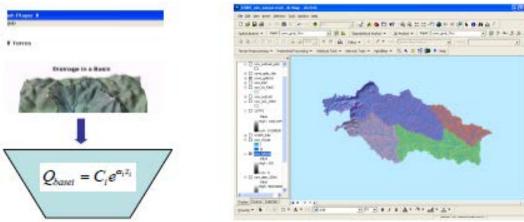

Basin, Coeff., Expon., Zmax, Zinit

1,1.0000, 3.000, 150.00,10.0000 2,1.0000, 3.000, 250.00,40.0000 3,1.0000, 3.000, 150.00,30.0000 4,1.0000, 3.000, 100.00,20.0000 5,1.0000, 3.000, 100.00,50.0000

From WRF-Hydro User Guide, Figure 3.7


Groundwater Representation

- Groundwater Bucket Parameters
 - Built using default groundwater bucket parameters combined with LINKID-based local contributing basins.
 - Other methods available to produce groundwater basins from
 - **Forecast Points**
 - Polygon Shapefile


imensi	ons: BasinDim = 2677135 ;	
ariabl		
	int Basin(BasinDim) ;	
	Basin:long_name = "Basin monotonic ID (1n)" ;	
	float Coeff(BasinDim) ;	
	Coeff:long_name = "Coefficient" ;	
	float Expon(BasinDim) ;	
	Expon:long_name = "Exponent" ;	
	float Zmax(BasinDim) ;	
	Zmax:long_name = "Zmax";	
	float Zinit(BasinDim) ;	
	Zinit:long_name = "Zinit";	
	float Area_sqkm(BasinDim) ; Area_sqkm:long_name = "Basin area in square kilometers" ;	
	int ComID(BasinDim);	
	ComID:long_name = "NHDCatchment FEATUREID (NHDFlowline ComID)" ;	
	Comit. Tong_name = NHDCattenment FEATORETD (NHDFTOWTTHE COmitD),	

GIS Pre-processor Outputs

- Set of netCDF, shapefile, ASCII & log files
 - 2-6 netCDF files
 - 0-2 Shapefiles
 - 1 .log file

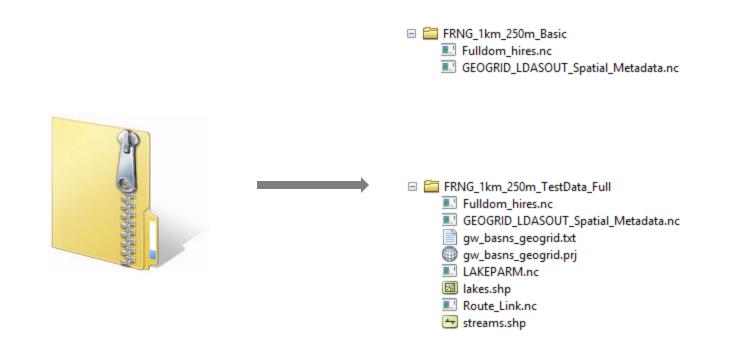

Other Utilities

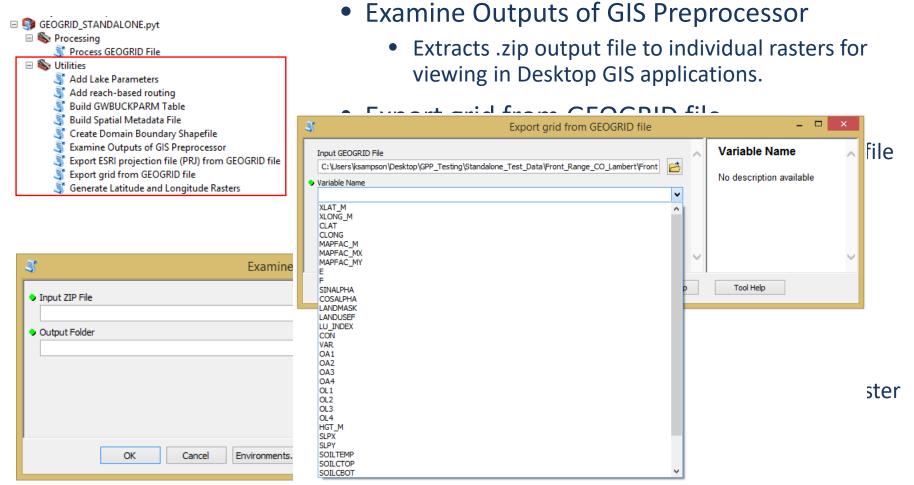

- Creates a polygon shapefile defining the domain boundary from a GEOGRID file
- Build Groundwater Inputs
 - Creates groundwater input files in 3 ways

Tool Messages

ProcessGeogridFile	
Completed	Close << Details
<pre>Close this dialog when completed successfully Process: flowdirection.nc completed withou Output File: E:\Projects\Gochis\dom Process: flow Accumulation completed withou Output File: E:\Projects\Gochis\dom Process: ovroughtfac.nc completed withou Output File: E:\Projects\Gochis\dom Process: st_order.nc completed withou Output File: E:\Projects\Gochis\dom Routing table will be created Stream to features step complete. Done reading streams layer. Done building Nodes layer with adjus Done extracting elevations to points Done reading Strahler stream orders. Routing table:</pre>	Results Image: Current Session Image: Current Session <
Completed without error. Completed script ProcessGeogridFile Succeeded at Mon Nov 17 20:01:54 2014 (Elaps	 Extraction of WRF routing grids completed. Completed script ExamineOutputs Succeeded at Sun Nov 16 22:30:32 2014 (Elapsed Time: 2.09 seconds)

Documentation & Test Data

- Detailed documentation
 - 40+ page PDF
 - Describes tool capabilities, requirements, parameters, and GIS methods used in the tool chain.
- Small GEOGRID domains for testing tool functionality
 - Croton, NY (Lambert Conformal Conic)
- Expected Output provided for comparison
- Required Elevation files (.tif) provided
- Optional stream gages & lakes provided

https://ral.ucar.edu/projects/wrf_hydro/pre-processing-tools

Bottlenecks/Constraints

- Project high-resolution dataset for large areas
 - Can be avoided by pre-projecting/resampling high res data before running the GIS pre-processor
- Flow Accumulation slowest part of the process
- Not multi-threaded... yet.
 - Process runs on one core for now
 - Process chain not well suited to parallelization
- Windows only GIS platform



https://github.com/NCAR/wrf_hydro_arcgis_preprocessor.git

C Thi	s repository Search	١	Pull requests	Issues	Gist					Ļ	+-	i (
I NCAR	/ wrf_hydro_arc	:gis_preprocessor					0	Unwatch 🔻	4 🖈 St	ar 2	۴ Fo	rk 1
<> Code	() Issues 0	្បាំ Pull requests 0	III Projects 0		/iki	-≁- Pulse	III Grap	ns 🔅 Set	ttings			
No descrip Add topics	tion, website, or t	opics provided.										Edit
	4 commits	ţ	1 branch			୍ଦ୍ର 0	releases		赴1	contribut	or	
Branch: ma	ster 🕶 New pull rec	quest					Create new file	Upload files	s Find file	Clone	or down	Iload -
kmsampson committed on GitHub Merge pull request #1 from NCAR/Version-4 Latest commit 4e76199 a minute ago								te ago				
GEOGR	RID_STANDALONE.P	rocessGeogridFile.pyt.xm	I.		v4.0) Initial R	elease			2	minute	es ago
			v4.0) Initial R	elease			2	minute	es ago		
wrf_hydro_functions.py			v4.0 Initial Release 2 minutes ago							es ago		



Thank you

Questions: wrfhydro@ucar.edu

GIS Pre-processing Demonstration

